

BOMAG 80AD-5



MARSH PLANT®

NEW LANE, HAVANT, HAMPSHIRE, PO9 2LZ
Telephone 023 9248 2323

Millbrook Road, Southampton
Hampshire, SO15 0LB
Telephone 023 8052 2600
southampton@marshplant.com

www.marshplant.com

Drakes Drive, longCrendon
Aylesbury, HP18 9BA
Telephone 01844 204000
longcrendon@marshplant.com

Cabot Lane, Creekmoor, Poole
Dorset BH17 7BX
Telephone 01202 642820
poole@marshplant.com

7b Watercombe Park
Gazelle Road, Yeovil
Somerset, BA20 2HL
Telephone 01935 415970
yeovil@marshplant.com

Wallingford Road, Uxbridge
Middlesex UB8 2SS
Telephone 01844 204000
longcrendon@marshplant.com

Technical Data

Shipping dimensions in m3	without ROPS	with ROPS
BW 80 AD-5	3,056	4,327
BW 90 AD-5	3,413	4,833
BW 100 ADM-5	3,770	5,338


Standard

- Pressure sprinkler system
- Hydrostatic travel and vibration drive
- Travel drive in series
- Hydrostatic articulated steering
- Oscillating artic. center joint
- Crab walk (0-50mm)
- Multi function travel lever
- Emergency stop button
- Individual control, vibration
- Intelligent Vibration Control (IVC)
- Round display with control and monitoring function
- Hour meter
- Integrated stowage compartment
- Adjustable operator's seat
- Seat contact switch
- Back-up alarm
- 2 scrapers per drum
- Engine hood made of composite material
- Single point lifting device
- V-belt protection
- Vandalism protection
- Working lights front and rear
- 12V socket

Options

- * ROPS with safety belt
- * Foldable ROPS + Seat belt
- Sun roof
- Edge cutter
- Double travel lever
- Battery disconnect switch
- Indicator and hazard lights
- Lamp guard
- Lighting for drum edge
- Rotary beacon
- Special painting
- electronic fuel gauge
- Backup warning buzzer with broadband technology
- BOMAG TELEMATIC
- Environmentally compliant hydraulic oil
- Tool kit
- Theft protection
- Additional weight
- Port for hydraulic breaker

* Standard delivery with CE conformity (valid within European Union)

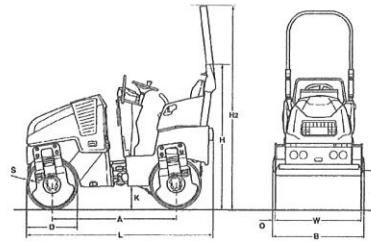

Dimensions in mm

	A	B	C	D	H	H2	K	L	O	S	W
BW 80 AD-5	1483	856	433	580	1627	2304	255	2194	28	13	800
BW 90 AD-5	1483	956	433	580	1627	2304	255	2194	28	12	900
BW 100 ADM-5	1483	1056	433	580	1627	2304	255	2194	28	12	1000

Technical Data

	BOMAG BW 80 AD-5	BOMAG BW 90 AD-5	BOMAG BW 100 ADM-5
--	---------------------	---------------------	-----------------------

Weights

Operating weight CECE	kg	1.550	1.600	1.650
Average static linear load CECE	kg/cm	9,7	8,9	8,3
Grossweight	kg	1.800	2.000	2.000

Dimensions

Working width	mm	800	900	1.000
Track radius, inner	mm	2.080	2.030	1.980

Driving Characteristics

Max. working speed with vibration	km/h	0- 4,5	0- 4,5	0- 4,5
Max. travel speed	km/h	0- 10,0	0- 10,0	0- 10,0
Max. gradeability without/with vibr.	%	40/30	40/30	40/30

Drive

Engine manufacturer	Kubota	Kubota	Kubota	
Type	D 902	D 902	D 902	
Cooling	water	water	water	
Number of cylinders	3	3	3	
Performance ISO 14396	kW	15,1	15,1	15,1
Performance SAE J 1995	hp	20,2	20,2	20,2
Speed adjustment 1	min-1	3.000	3.000	3.000
Speed adjustment 2	min-1	2.100	2.100	2.100
Electric equipment	V	12	12	12
Drive system	hydrost.	hydrost.	hydrost.	
Driven drum	front + rear	front + rear	front + rear	

Brakes

Service brake	hydrost.	hydrost.	hydrost.
Parking brake	hydromec.	hydromec.	hydromec.

Steering

Steering system	oscil.artic.	oscil.artic.	oscil.artic.
Steering method	hydrost.	hydrost.	hydrost.
Steering angle +/-	grad	33	33
Oscillating angle +/-	grad	8	8

Exciter system

Vibrating drum	front + rear	front + rear	front + rear
Drive system	hydrost.	hydrost.	hydrost.
Frequency	Hz	63/42	63/42
Amplitude	mm	0,50	0,50
Centrifugal force	kN	17/8	17/8

Sprinkler System

Type of sprinkling	pressure	pressure	pressure
--------------------------	----------	----------	----------

Capacities

Fuel	l	30	30	30
Water	l	100	100	100

Technical modifications reserved. Machines may be shown with options.