

MANITOU MT 932



MARSH PLANT®

NEW LANE, HAVANT, HAMPSHIRE, PO9 2LZ

Telephone 023 9248 2323

Millbrook Road, Southampton
Hampshire, SO15 0LB
Telephone 023 8052 2600
southampton@marshplant.com

www.marshplant.com


Drakes Drive, longCrendon
Aylesbury, HP18 9BA
Telephone 01844 204000
longcrendon@marshplant.com


Cabot Lane, Creekmoor, Poole
Dorset BH17 7BX
Telephone 01202 642820
poole@marshplant.com

7b Watercombe Park
Gazelle Road, Yeovil
Somerset, BA20 2HL
Telephone 01935 415970
yeovil@marshplant.com


Wallingford Road, Uxbridge
Middlesex UB8 2SS
Telephone 01844 204000
longcrendon@marshplant.com


MT 932


 **Lifting capacity**3200 kg
at 500 mm from forks heels.
Tipping load
at maximum reach :673 kg
Tear out force with bucket
to ISO 83137400 daN


 **Lifting height** :9.00 m
Times : unladen / loaded (in s)
Lifting6.7/7.3
Lowering5/4.7
Simultaneous extension 1st and 2nd booms...12.2/13.3
Simultaneous retraction 1st and 2nd booms.....8/7.6
Time unladen (in s)
Crowd2.8
Dump2.3


 **Tyres**
14.9 - 24 18PR


 **Forks** (mm)
Length1200
Width x thickness125 X 45
Maximum distance between forks.....1040
Carriage rotation126°


 **Multidisc brakes on 4 wheels.**

 **PERKINS Engine**
Type1004.42
Capacity4 cyl. 4233 cm³
Power at 2200 rpm :81 HP/ 60 kw
(ISO/TR 14396)
Maximum torque :290 Nm at 1400 rpm
Direct injection
Water cooling

 **Transmission**Torque Converter
Electro - Hydraulic reversing shift
4 speeds forward and reverse
Maximum travel speed.....25 km/h


 **Hydraulics**
Lifting/tilting pump
gear type:260 bars /105 l/mn
Flow divider with priority to steering and brakes.

 **Capacities**
Cooling system.....24.5 l.
Engine oil.....10.5 l.
Hydraulic oil125 l.
Transmission oil16 l.
Fuel tank120 l.


 **Weight unladen** (with forks)7640 kg
Overall width2.26 m
Overall height2.30 m
Turning radius (outside wheels).....3.68 m
Overall length4.71 m
Ground clearance0.44 m
Drawbar pull6800 daN

This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice.
The MANITOU models presented in this brochure can be supplied complete with optional equipment attachments



Reach at maximum height : 2.35 m

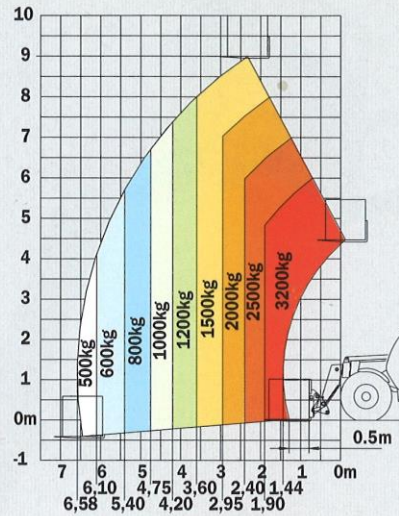

Under prEN 1459 annexe B

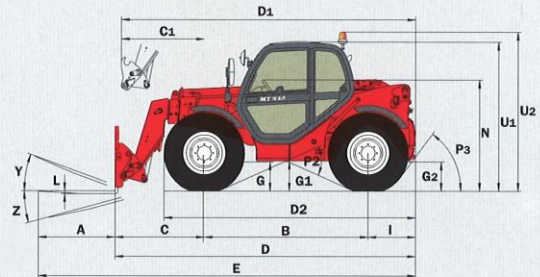

A	1200
B	2560
C	1393
D	1491
D1	4713
D2	4811
E	3905
F	5913
F1	1846
G	1846
G1	460
G2	440
I	445
J	760
K	865
L	1040
M	45
N	1690
O	125
P2	47.5°
P3	53°
R	3475
S	7548
T	4185
U1	2300
U2	2550
V	4770
V1	1205
V2	3675
W	2261
Y	11,9°
Z	113,7°

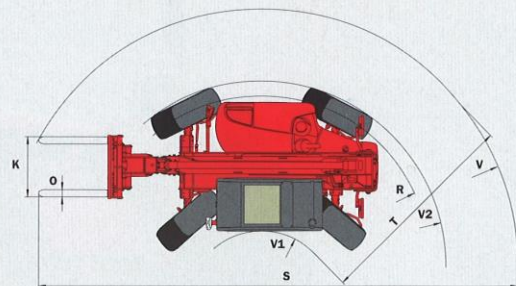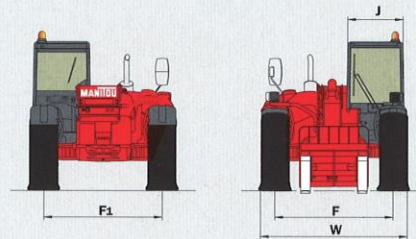

IN ACCORDANCE WITH

MARKING

